


FLANGE CONE LONGO - ASA B - 5.9

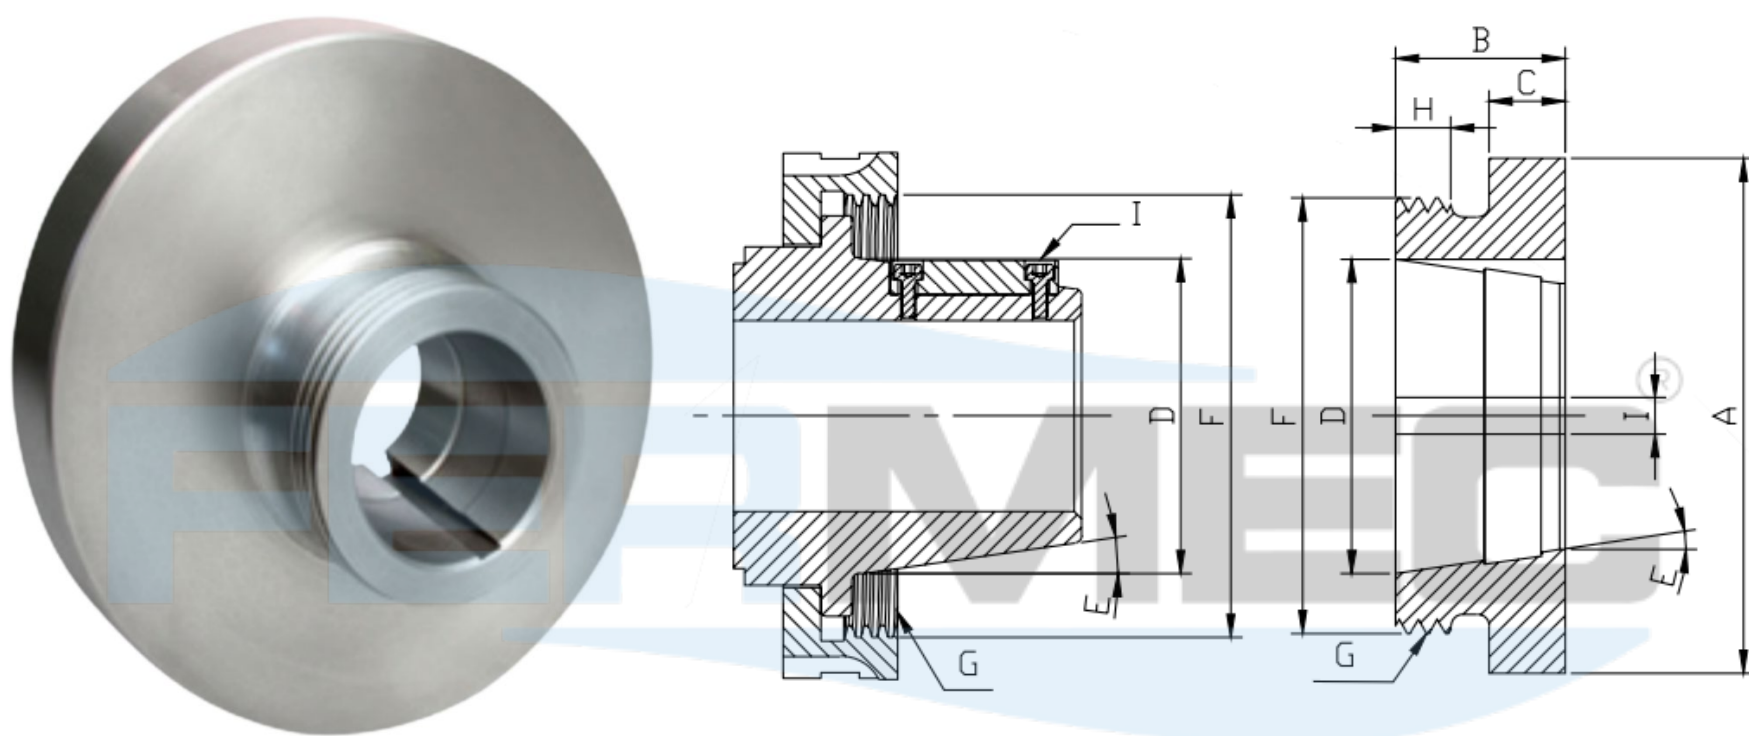

Código	Cone	A Ø	B	C	D	E	F*	G	H	I
FCL-160	L00	160	54	22	69,85	8°17'50"	95,12	6F.P.P.	14	9,57
FCL-190	L00	190	54	25	69,85	8°17'50"	95,12	6F.P.P.	14	9,57
FCL-210	L00	210	54	25	69,85	8°17'50"	95,12	6F.P.P.	14	9,57
FCL-255	L00	255	54	28	69,85	8°17'50"	95,12	6F.P.P.	14	9,57
FCL-190	L0	190	63,5	25	82,55	8°17'50"	114,17	6F.P.P.	12	9,57
FCL-210	L0	210	63,5	25	82,55	8°17'50"	114,17	6F.P.P.	12	9,57
FCL-255	L0	255	63,5	28	82,55	8°17'50"	114,17	6F.P.P.	12	9,57
FCL-320	L0	320	63,5	32	82,55	8°17'50"	114,17	6F.P.P.	12	9,57
FCL-400	L0	400	63,5	36	82,55	8°17'50"	114,17	6F.P.P.	12	9,57
FCL-255	L1	255	76,2	28	104,77	8°17'50"	152,27	6F.P.P.	16	15,92
FCL-320	L1	320	76,2	32	104,77	8°17'50"	152,27	6F.P.P.	16	15,92
FCL-400	L1	400	76,2	36	104,77	8°17'50"	152,27	6F.P.P.	16	15,92
FCL-460	L1	460	76,2	40	104,77	8°17'50"	152,27	6F.P.P.	16	15,92
FCL-400	L2	400	89	36	133,35	8°17'50"	196,72	5F.P.P.	22	19,1
FCL-460	L2	460	89	40	133,35	8°17'50"	196,72	5F.P.P.	22	19,1
FCL-530	L2	530	89	40	133,35	8°17'50"	196,72	5F.P.P.	22	19,1
FCL-650	L2	650	89	50	133,35	8°17'50"	196,72	5F.P.P.	22	19,1
FCL-530	L3	530	102	40	165,1	8°17'50"	263,39	4F.P.P.	24	25,45
FCL-650	L3	650	102	50	165,1	8°17'50"	263,39	4F.P.P.	24	25,45
FCL-750	L3	750	102	60	165,1	8°17'50"	263,39	4F.P.P.	24	25,45
FCL-255-E	Especial	255	76,2	28	101	8°17'50"	127	6F.P.P.	16	15,92
FCL-320-E		320	76,2	32	101	8°17'50"	127	6F.P.P.	16	15,92
FCL-400-E		400	76,2	36	101	8°17'50"	127	6F.P.P.	16	15,92
FCL-460-E		460	76,2	40	101	8°17'50"	127	6F.P.P.	16	15,92

* Ø sobre a rosca