


MANDRIL APERTO RÁPIDO

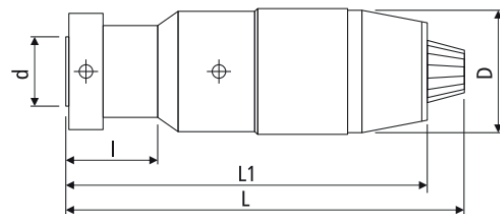

Código	Modelo	Capac.	Encaixe (d)	d	I	D	L (± 1mm)	L1 (± 0.5mm)	Batim. Máx.
05180	13 B16	1-13mm	B16	15,733	24	44	96	86,5	0,2
05182	13 J2	1-13mm	J2	14,199	22,225	44	96	86,5	0,2
05183	13 J6	1-13mm	J6	17,17	25,4	44	96	86,5	0,2
05181	13 1/2"x20unf	1-13mm	1/2-20unf	1/2-20unf	24	44	96	86,5	0,2
05184	16 B16	1-16mm	B16	15,733	28	51	115	103	0,2
05185	16 B18	1-16mm	B18	17,78	28	51	115	103	0,2
05186	16 J6	1-16mm	J6	17,17	25,4	51	115	103	0,2
05187	16 5/8"x16unf	1-16mm	5/8-16unf	5/8-16unf	28	51	115	103	0,2
05188	20 B22	5-20mm	B22	21,793	34	57	132	118	0,2