

ALARGADOR MÁQUINA HASTE CILÍNDRICA CORTE HELICOIDAL


5202 - Alargador máquina, para furo tolerância H7, haste cilíndrica, corte à direita, dente helicoidal, hélice à esquerda.



HÉLICE 8°	M2	DIN 212 D		
--------------	----	--------------	--	--

d1 H7 (mm)	L2 (mm)	L1 (mm)	CM	Z
2	11	49	2	4
2,5	14	57	2,5	4
3	15	61	3	4
3,5	18	70	3,5	4
4	19	75	4	4
4,5	21	80	4,5	4
5	23	86	5	4
5,5	26	93	5,6	6
6	26	93	5,6	6
6,5	28	101	6,3	6
7	31	109	7,1	6
7,5	31	109	7,1	6
8	33	117	8	6
8,5	33	117	8	6
9	36	125	9	6
9,5	36	125	9	6
10	38	133	10	6
11	41	142	10	8
12	44	151	10	8
13	44	151	10	8
14	47	160	12,5	8
15	50	162	12,5	8
16	52	170	12,5	8
17	54	175	14	8
18	56	182	14	8
19	58	189	16	8

d1 H7 (mm)	L2 (mm)	L1 (mm)	CM	Z
20	60	195	16	8
21	60	195	18	10
22	60	225	18	10
23	60	230	18	10
24	60	240	20	10
25	60	245	20	10
26	60	250	20	10 ^R
28	65	270	22	10
30	65	270	22	10

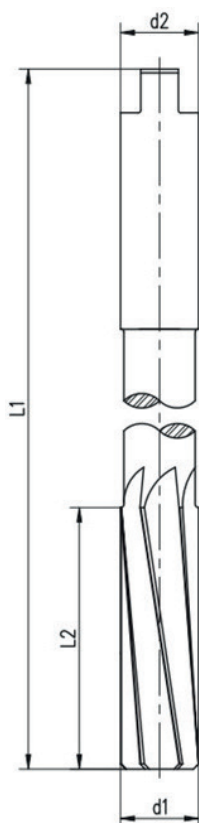

NOTA:

d1 < 9,5 - DIN 1809 - sem espiga de arraste

ALARGADOR MÁQUINA HASTE CILÍNDRICA CORTE HELICOIDAL

5202 - Alargador máquina, para furo tolerância H7, haste cilíndrica, corte à direita, dente helicoidal, hélice à esquerda.



HÉLICE 8°	M2	DIN 212 D		
--------------	----	--------------	--	--

d1 H7 (pol.)	L2 (mm)	L1 (mm)	d2 h9 (pol.)	Z
1/8	17	70	0.1378	4
5/32	19	76	0.1510	4
3/16	22	86	0.1805	4
7/32	25	92	0.2075	6
1/4	29	102	0.2405	6
9/32	32	108	0.2485	6
5/16	33	117	0.2792	6
11/32	33	117	0.2792	6
3/8	38	133	0.3105	6
7/16	41	140	0.3730	8
1/2	45	152	0.4355	8
9/16	48	159	0.4355	8
5/8	51	171	0.5620	8
11/16	57	181	0.5620	8
3/4	59	190	0.6245	8
13/16	60	190	0.6245	8
7/8	64	203	0.7495	10
15/16	64	203	0.7495	10
1	70	254	0.8745	10

